



Material:
PVC/Silicon Optional



Waterproof Rating:
IP68



Bending Direction:
Vertical



Beam Angle:
210°



Min. Bending:
120mm



Installation Temp:
0°C - 50°C



Operating Temp:
-25°C - 50°C





Weight:
0.43kg/m



Dimmable:
DALI, 0-10V, DMX, Triac



CRI:
>80+

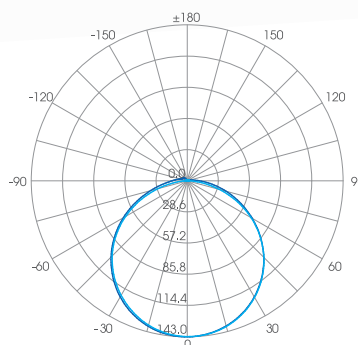

H²O FLEX-80 STATIC COLOUR

ILFX80-24-9W-120-V

Input Voltage:	24V
Watts/m:	9W
Dimming:	YES
Beam Angle:	210
LED Chips/m:	120
Cutting Length (LED QTY):	12
Cutting Length (mm):	100
Max Length (One Feed/m):	10

Available Colours

2200K - 600lm/m	Amber	130lm/m
2700K - 600lm/m	Blue	95lm/m
3000K - 630lm/m	Green	450lm/m
3500K - 630lm/m	Orange	90lm/m
4000K - 630lm/m	Pink	210lm/m
5000K - 670lm/m	Red	180lm/m
6500K - 670lm/m		

ILFX80-24-10W-120-V

Input Voltage:	24V
Watts/m:	10W
Dimming:	YES
Beam Angle:	210
LED Chips/m:	144
Cutting Length (LED QTY):	12
Cutting Length (mm):	83.3
Max Length (One Feed/m):	10

Available Colours

2200K - 600lm/m	Amber	140lm/m
2700K - 610lm/m	Blue	97lm/m
3000K - 630lm/m	Green	465lm/m
3500K - 630lm/m	Orange	95lm/m
4000K - 640lm/m	Pink	230lm/m
4500K - 640lm/m	Red	192lm/m
5000K - 670lm/m		
6500K - 670lm/m		



H²O FLEX-80 TUNABLE WHITE

ILFX80-24-15W-120-V-TW

Available Colours

Input Voltage:	24V	2200K+5700K - 310lm/m-440lm/m
Watts/m:	15W	2700K+5700K - 330lm/m-440lm/m
Dimming:	YES	3000K+5700K - 330lm/m+440lm/m
Beam Angle:	210	
LED Chips/m:	120	
Cutting Length (LED QTY):	12	
Cutting Length (mm):	100	
Max Length (One Feed/m):	10	

H²O FLEX-80 RGB

ILFX80-24-13W-120-V-RGB

Available Colours

Input Voltage:	24V	R: 140lm/m, G: 300lm/m, B: 80lm/m
Watts/m:	13W	
Dimming:	YES	
Beam Angle:	210	
LED Chips/m:	72	
Cutting Length (LED QTY):	6	
Cutting Length (mm):	83.3	
Max Length (One Feed/m):	10	

H²O FLEX-80 RGB/W

ILFX80-24-17W-120-V-RGBW

Available Colours

Input Voltage:	24V	R: 35lm/m, G: 230lm/m, B: 60lm/m
Watts/m:	17W	RGBW(2700K)- 330lm/m
Dimming:	YES	RGBW(3000K)- 340lm/m
Beam Angle:	210	RGBW(4000K)- 360lm/m
LED Chips/m:	72	RGBW(5000K)-380lm/m
Cutting Length (LED QTY):	6	
Cutting Length (mm):	83.3	
Max Length (One Feed/m):	8	



H²O FLEX-80 DYNAMIC COLOUR CHANGING

ILFX80-24-15W-120-V-RGB-DMX

Input Voltage:	24V
Watts/m:	15W
Dimming:	DMX
Beam Angle:	210
LED Chips/m:	70
Cutting Length (LED QTY):	7
Cutting Length (mm):	100
Max Length (One Feed/m):	8

Available Colours

R: 130lm/m, G: 300lm/m, B: 70lm/m

ILFX80-24-18W-120-V-RGBW-DMX

Input Voltage:	24V
Watts/m:	18W
Dimming:	DMX
Beam Angle:	210
LED Chips/m:	70
Cutting Length (LED QTY):	7
Cutting Length (mm):	100
Max Length (One Feed/m):	8

Available Colours

R: 130lm/m, G: 300lm/m, B: 70lm/m

RGBW(2700K)- 200lm/m

RGBW(3000K)- 220lm/m


RGBW(4000K)- 240lm/m

RGBW(5000K)- 260lm/m


FLEXIBLE & RIGID ALUMINIUM MOUNTING PROFILE



Dimensions




Mounting



PLASTIC MOUNTING PROFILE



Dimensions



Mounting

