

Order options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

3000K
4000K

COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



30° Beam

60° Beam

REFLECTOR




Matt

White

Black

ILD150

3000K
(Standard)



IP54 **UGR <19**




Light distribution for 3000K


18W 2000 lm – 2500 lm



ILD150-18W-830-30
ILD150-18W-840-30

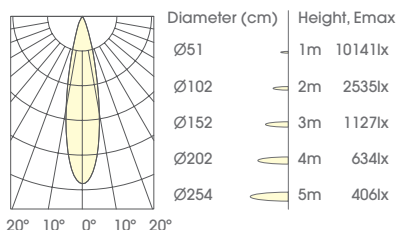

ILD150-18W-830-60
ILD150-18W-840-60

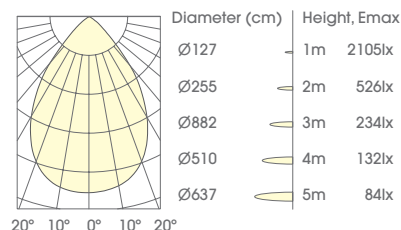

Specification Details


ILD150-18W 2000-2500 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD150-18W-830-30	2800 lm	2300 lm	36 V	500 mA	18 W	21 W	80	3000K	30°
ILD150-18W-840-30	3000 lm	2500 lm	36 V	500 mA	18 W	21 W	80	4000K	30°
ILD150-18W-830-60	2800 lm	2000 lm	36 V	500 mA	18 W	21 W	80	3000K	60°
ILD150-18W-840-60	3000 lm	2200 lm	36 V	500 mA	18 W	21 W	80	4000K	60°


25W 2700 lm – 3300 lm



ILD150-25W-830-30
ILD150-25W-840-30

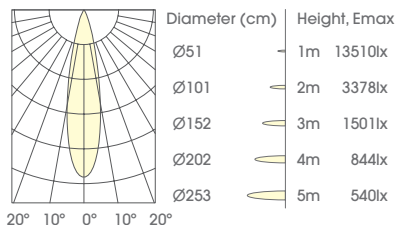

ILD150-25W-830-60
ILD150-25W-840-60

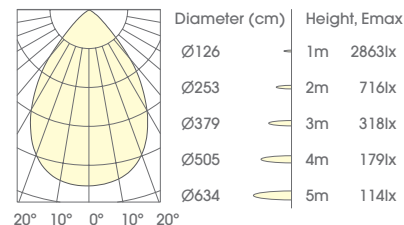

Specification Details

ILD150-25W 2700-3300 Lm (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
ILD150-25W-830-30	3800 lm	3100 lm	36 V	700 mA	25 W	28 W	80	3000K	30°
ILD150-25W-840-30	4000 lm	3300 lm	36 V	700 mA	25 W	28 W	80	4000K	30°
ILD150-25W-830-60	3800 lm	2700 lm	36 V	700 mA	25 W	28 W	80	3000K	60°
ILD150-25W-840-60	4000 lm	2900 lm	36 V	700 mA	25 W	28 W	80	4000K	60°